


ADD WAISTBAND TO SKIRT: PLACE RIGHT SIDES TOGETHER (A) ALLOW 1" OVERLAP MACHINE TOGETHER: TURN TO WRONG SIDE AND TURNING ALLOWANCE IN- FINISH BY HAND (B)

8

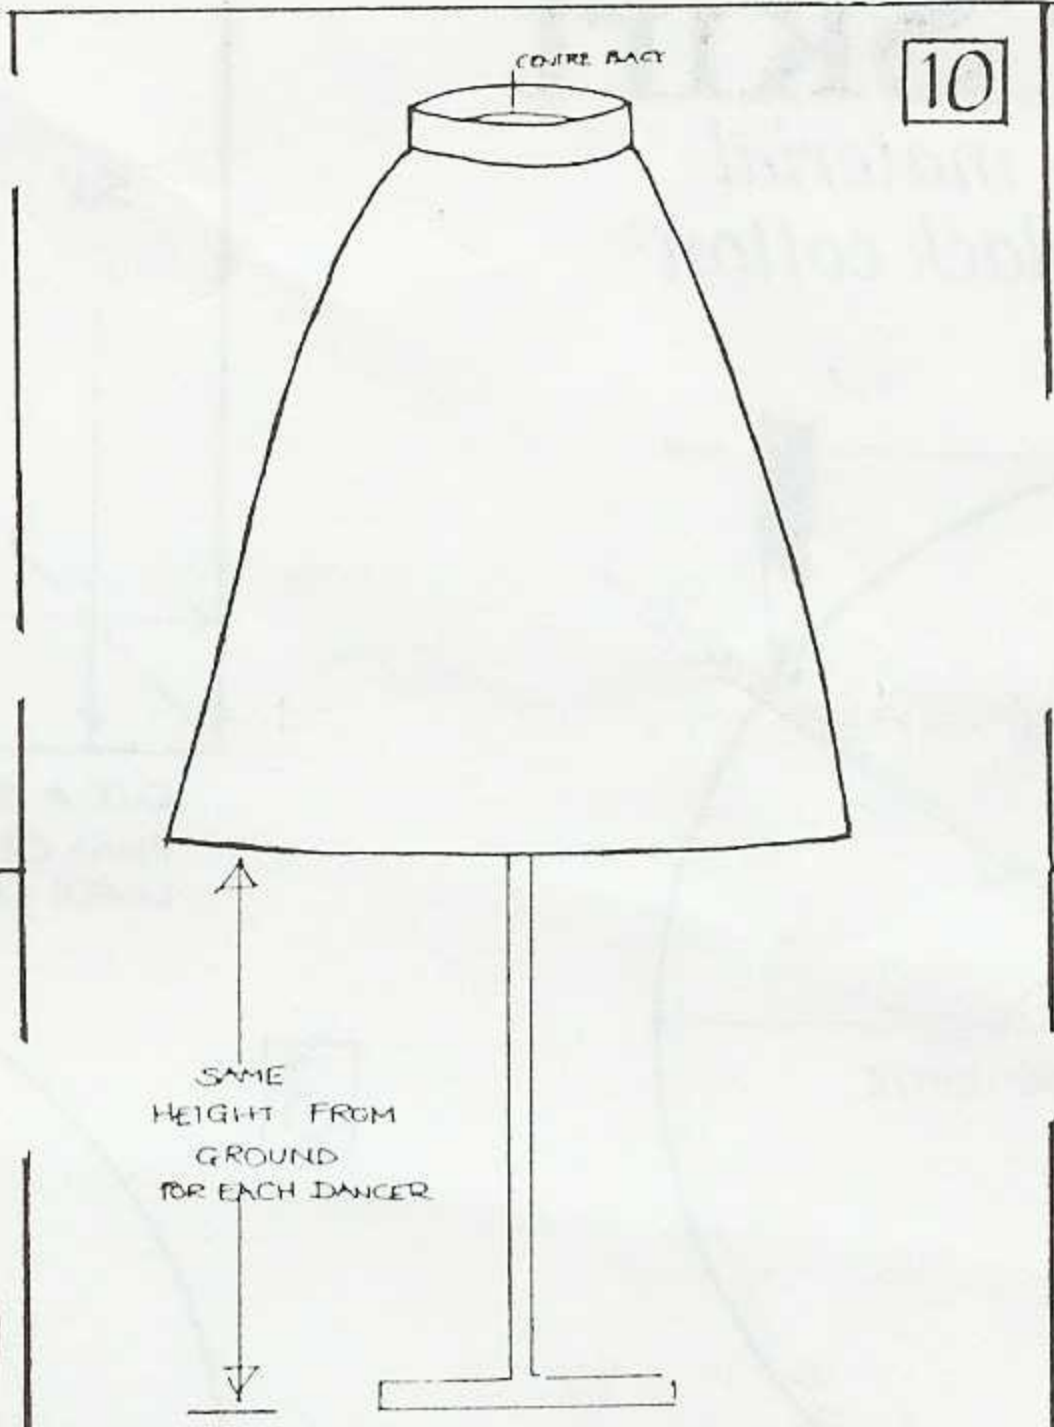


OBTAINING CORRECT LENGTH ON EVERYONE

- (A) PUT SKIRT ON DANCER
- (B) WITH YARD STICK MEASURE UP FROM GROUND
- (C) MARK WITH PINS EVERY 4" ROUND ENTIRE HEM
- (D) MARK WITH CHALK
- (E) ADD ON 1" FOR HEM + 1/2" TURNING PLUS 1/2" HEM

AGREED LENGTH = MID-CALF


David Dean ©1990

10

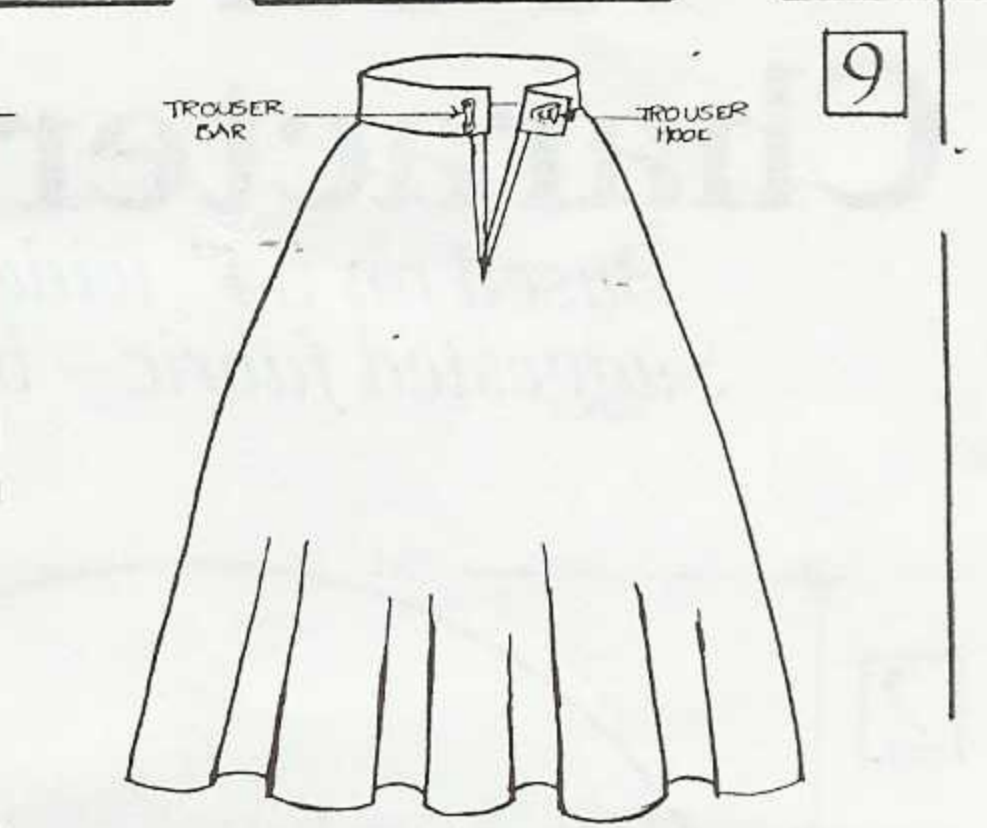


ATTACH TROUSER HOOK AND BAR TO WAIST BAND (A) FIRST PLACE HOOK WITH EDGE OF HOOK TO EDGE OF OVERLAP (B) ATTACH BAR INTO POSITION ENSURING THE RIGHT SIDE SITS IN STRAIGHT LINE WITH PLAQUET

9

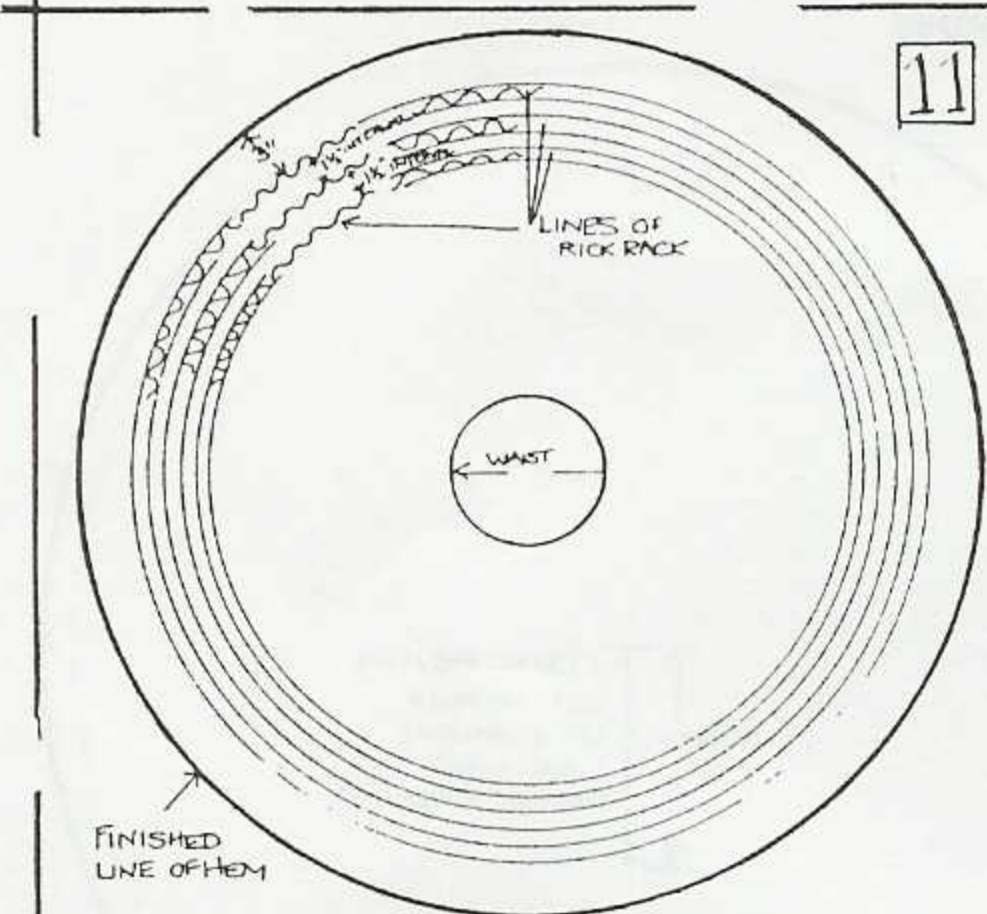

START RICK RACK AT APPROX 3" FROM FINISHED HEM LINE ADDITIONAL ROWS OF RICK RACK: APPROX 1 1/2" FROM CENTRE OF EACH BAND

11

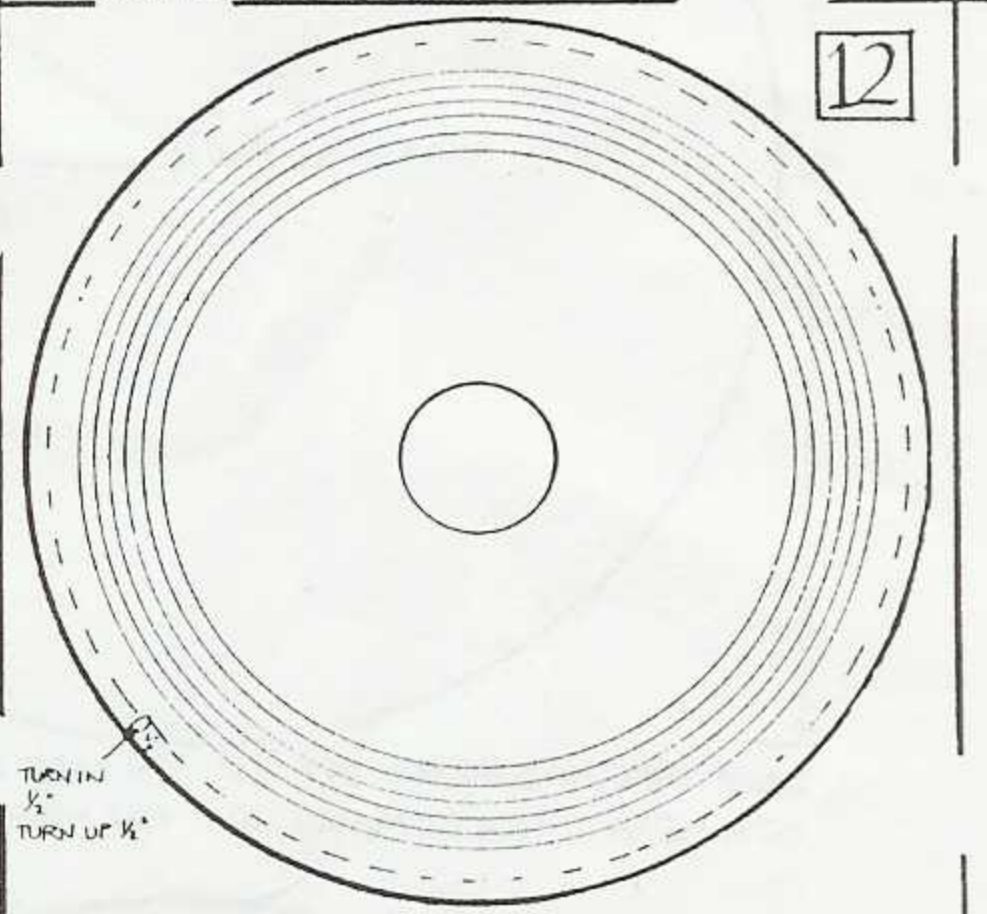

TURN UP HEM + SEW = PRESS UP 1/2" SEAM ALLOWANCE: THEN TURN UP 1/2" AGAIN FOR HEM AND SEW BY MACHINE

12